

XFTC310 Miniature Load Cell



- Range from 0-2N to 0-2KN [0.4 lbf to 400 lbf]
- Tension and/or Compression
- High Stiffness
- For Static and Dynamic Applications
- Threaded Male/Female Mechanical Fitting
- High Overload Capacity
- High Level Output Model with Integrated Amplifier

DESCRIPTION

The XFTC310 series has been specifically developed to measure tension and/or compression in static and dynamic applications. The miniature size and lightweight facilitate testing where these conditions are necessary. The sensing element is fitted with a fully temperature compensated Wheatstone bridge equipped with high stability micro-machined silicon strain gages. The use of silicon strain gages optimises the load cell's performance at low ranges and frequencies. For sensors with a range of between 500 N and 2 kN [100 and 400 lbf], a high-level output model is available. With two threaded male/female studs, the XFTC310 is easily installed in industrial or OEM applications. A strain relief spring strengthens the cable output.

With many years of experience as a designer and manufacturer of sensors, Measurement Specialties, Inc. often works with customers to design or customize sensors for specific uses and testing environments.

To meet your needs we also offer complete turnkey systems. The matched components (sensor, power, amplifier and digital display) are formatted, calibrated and ready for immediate use.

FEATURES

- Small design easy to mount
- Tension and/or Compression
- Optional IP rating improvement
- Extended temperature range available
- Other male/female threads available

APPLICATIONS

- Strain measurement on finger-like command
- Connector and cable traction tests
- Miniature press-fit device
- Robotics regulation
- Small size actuators

STANDARD RANGES

F.S. Ranges in N	2 - 5 - 10 - 20 - 50	100 to 200	500 to 1k	2k
F.S. Ranges in lbf	0.4 - 1 - 2 - 4 - 10	20 to 40	100 to 200	400
Stiffness in N/m	3.8×10^5 to 4.7×10^7	7.9×10^7 to 2.2×10^8	3.4×10^8 to 9.6×10^8	2.7×10^9
Stiffness in lbf/ft	2.4×10^4 to 3.2×10^5	5.4×10^5 to 1.5×10^7	2.3×10^7 to 6.6×10^7	1.9×10^8
Materials	Aluminum	Stainless Steel		

XFTC310 Miniature Load Cell

PERFORMANCE SPECIFICATIONS

Ambient Temperature: 20±1° C (unless otherwise specified)

PARAMETERS	
Operating Temperature Range (OTR)	-40 to 120°C [-40 to 248°F]
Compensated Temperature Range (CTR)	0 to 60° C [32 to 140° F]
Zero Shift in CTR	<2% F.S. / 50° C [100° F]
Sensitivity Shift in CTR	<2% of reading / 50° C [100° F]
Range (F.S.)	0-2N to 0-2kN [0-0.4 lbf to 0-400 lbf]
Over-Range	
Without Damage	2 to 4 x F.S.
Without Destruction	3 to 6 x F.S.
Accuracy	
Linearity	≤±0.5% F.S.
Hysteresis	≤±0.5% F.S.

Electrical Characteristics



Model	XFTC310	XFTC310-A1	XFTC310-A2
Supply Outage	10Vdc	10 – 30Vdc	±15Vdc (±12 to ±18Vdc)
F.S. Output	±100mV	±2V ±5% F.S.	±5V ±5% F.S.
Zero Offset	<±10mV	2.5V ±5% F.S.	0V ±5% F.S.
Input Impedance/Consumption	1000 to 3000Ω	<30mA	30mA
Output Impedance	500 to 1000Ω	<10Ω	<10Ω
Insulation under 50Vdc	≥100MΩ	≥100MΩ	≥100MΩ

Notes

1. Shielded cable with 4 Teflon wires (AWG36/28), standard length 2 m [6.5 ft] with strain relief spring
2. Material: Body in stainless steel or aluminum alloy depending on F.S. ; Two male/ female threads M5 or [10-32 UNF], M10 or [3/8-24 UNF] depending on F.S. (metric thread is standard)
3. Protection Index: IP50 (other levels available on request)
4. A1 and A2 options are only available for ranges 500N, 1kN and 2 kN

XFTC310 Miniature Load Cell

DIMENSIONS & WIRING SCHEMATIC (IN METRIC AND IMPERIAL)

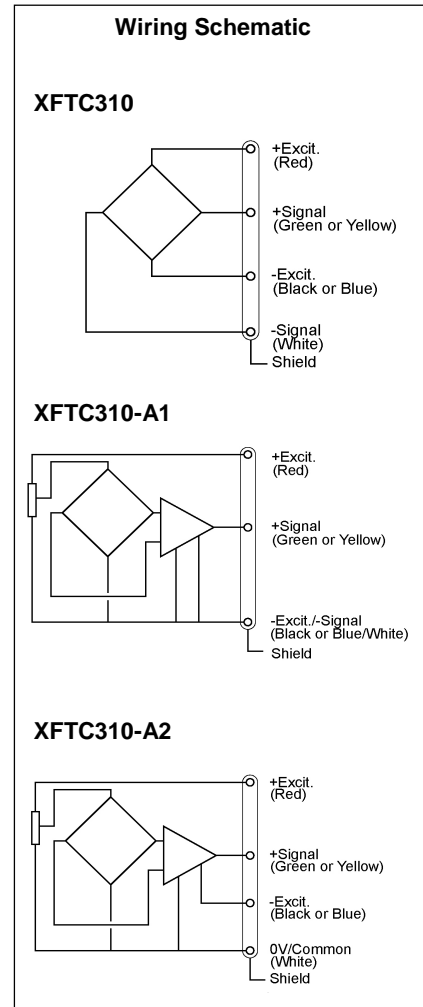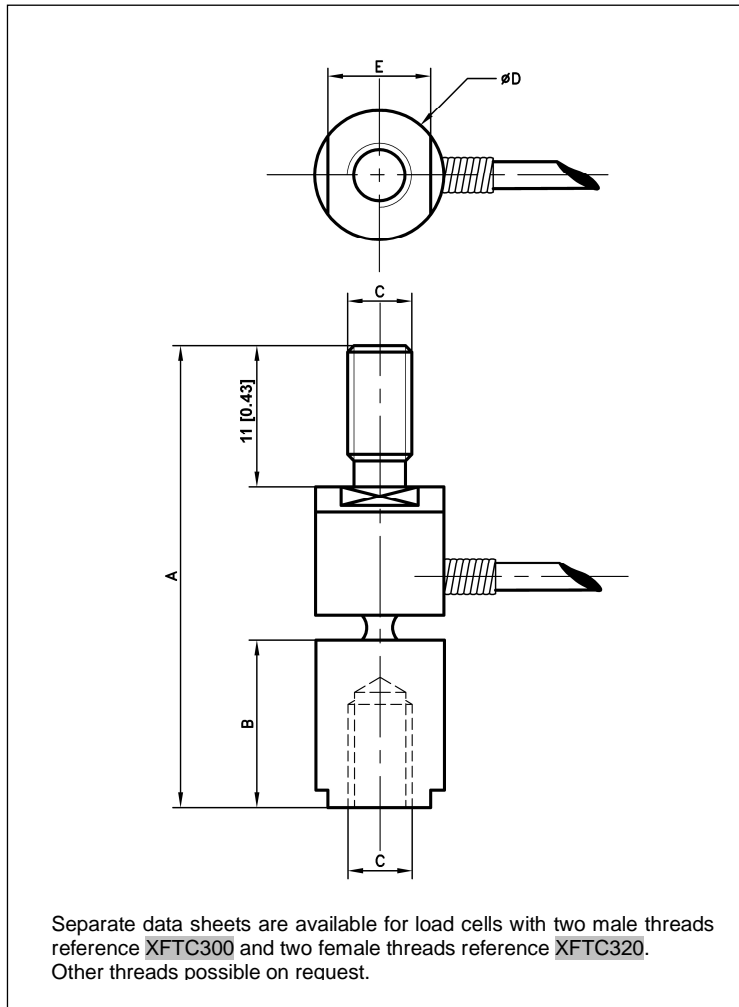

Dimensions in mm [inch]

Full Scale Range in N [in lbf]	2 - 5 - 10 - 20 - 50 [0.4 - 1 - 2 - 4 - 10]	100 - 200 [20 - 40]	500 - 1000 [100 - 200]	2000 [400]
A	36 [1.42]		47 [1.85]	
B	13 [0.51]		14 [0.55]	
C (Thread)	M5		M10	
Depth (internal only)	8 [0.31]		10 [0.39]	
Ø D	10 [0.39]		16 [0.63]	20 [0.79]
E	8 [0.31]		12 [0.47]	16 [0.63]
Material	Aluminum Alloy		Stainless Steel	
Stiffness in N/m	3.8x10 ⁵ to 4.7x10 ⁷	7.9x10 ⁷ to 2.2x10 ⁸	3.4x10 ⁸ to 9.6x10 ⁸	2.7x10 ⁹
Stiffness in lbf/ft	2.6x10 ⁴ to 3.2x10 ⁶	5.4x10 ⁶ to 1.5x10 ⁷	2.3x10 ⁷ to 6.6x10 ⁷	1.9x10 ⁸
Over-range	x4	x3	x3	x2

XFTC310 Miniature Load Cell

OPTIONS

A1	: Unipolar tension (only available for ranges 500N, 1kN and 2kN)
A2	: Bipolar Tension (only available for ranges 500N, 1kN and 2kN)
ET1	: CTR -20 to 100° C [-4 to 212° F]
ET2	: CTR -40 to 120° C [-40 to 248° F]
ET3	: CTR -40 to 150° C [-40 to 302° F] OTR = CTR (op tion not compatible with A1 and A2 versions)
HA	: Accuracy (CNL&H) $\pm 0.5\%$ F.S. (for models $\geq 100\text{N}$; 20lbf)
TS	: Tolerance on F.S. output $\leq \pm 2\%$ F.S.
LC"x"	: Additional cable length to standard length (in m) (Note : "X" = Custom value)

ORDERING INFO

XFTC310 - A1 - 2KN - /HA/ET1



NORTH AMERICA

Measurement Specialties, Inc.
1000 Lucas Way
Hampton, VA 23666
USA
Tel: 1-757-766-1500
Fax: 1-757-766-4297
pvg.cs.amer@meas-spec.com

EUROPE

Measurement Specialties
(Europe), Ltd.
26 Rue des Dames
78340 Les Clayes-Sous-Bois,
France
Tel: +33 (0) 130 79 33 00
Fax: +33 (0) 134 81 03 59
pfg.cs.emea@meas-spec.com

ASIA

北京赛斯维测控技术有限公司
北京市朝阳区望京西路48号
金隅国际C座1002
电话: +86 010 8477 5646
传真: +86 010 5894 9029
邮箱: sales@sensorway.cn
<http://www.sensorway.cn>

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.